

Gleenair




**Guangzhou Pofin Electro
-mechanical Equipment Co.,Ltd**



Website: www.pofin.cn
Address: Room 501, Building 3, Hongji Garden, No.489
Shiqiao East Ring Road, Panyu District, Guangzhou City,
Guangdong Province, China

蛋格风口、铁双层百叶带滤网、检修口、调节阀 Eggcrate Diffuser with Adaptor / GI Double Deflection Grille with Filter / Access Panel / Volume Control Damper	P 01
方形散流器 4 Way Square Air Diffuser	P 02-P 03
球型喷射口、旋流风口 Ball Jet Diffuser JDT / Swirl Diffuser SWD	P 04-P 05
可调球形出风口、座椅风口 Ball Type Jet Diffuser JDTS / Seat Diffuser FS	P 06-P 07
圆型散流器 Round Air Diffuser	P 08-P 10
高环形风口、环形风口、圆盘铁风口 Round Jet Air Diffuser RDT / Round Jet Air Diffuser RDTS / Disc Valve DSV	P 11-P 12
蛋格片、外气口 Egg Crate / Round Exhaust Air Vent RLS	P 13
人字闸、ABS 黑色风闸、扇形风闸 Opposed Blade Damper / ABS Round Damper / Round Opposed Blade Damper	P 14-P15
检修门 Access Door	P 16
双层百叶风口、防水百叶风口、线槽风口、线型风口 Double Deflection Air Grille / Weather Louver Air Grille / Linear Slot Diffuser / Linear Diffuser	P 17
防水百叶风口、ABS塑钢圆形风口、线型风口、圆形外框 Weather Louver Air Grille / ABS Rotatable Air Diffuser / Linear Diffuser / Round Frame	P 18
ABS 可拆方形散流器、ABS 圆形风口 ABS Square Diffuser / ABS Round Diffuser	P 19
线槽风口、导流风口、导流风口、带框无边线条 Linear Slot Diffuser, Plate Type Ceiling Diffuser, Linear Grille	P 20
三面出风散流器、直角方散、矩形风口、双层百叶方散带方转圆 3 Way Square Diffuser / Square Diffuser / Rectangular Diffuser / Double Deflection Diffuser with Adaptor	P 21
旋流板、扣板方圆散、圆盘风口 Swirl Diffuser / Aluminum Circular Ceiling Diffuser / Round Type Ceiling Diffuse	P 22
不锈钢风口 Stainless Steel Air Grille	P 23
艺术风口 Decorative Air Grille	P 24-P25
法兰条、法兰夹、钩码、 Flange Profile / Flange Cleat/G-Clamp	P 26-P27
法兰角码、共板角码 TDC Corner / TDF Corner	P 28-P31
配件 Hardware Accessories	P 32-P39

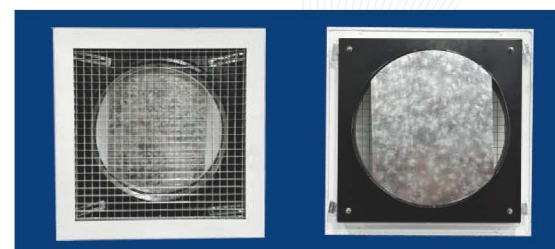

蛋格风口带方转圆
Eggcrate Diffuser with Adaptor



铁双层百叶带滤网
GI Double Deflection Grille with Filter

检修口
Access Panel




调节阀
Volume Control Damper



方形散流器（冲压无缝型）


方形散流器具有良好的送风效果和美观的外形，它具有四种不同方向的送风形式供选择，可满足不同的送风效果。散流器外框与内芯采用组合式结构，拆装简便快捷。该风口广泛用于中央空调系统中作送风作用，是空调工程中应用最广泛的风口之一。

4AD-A

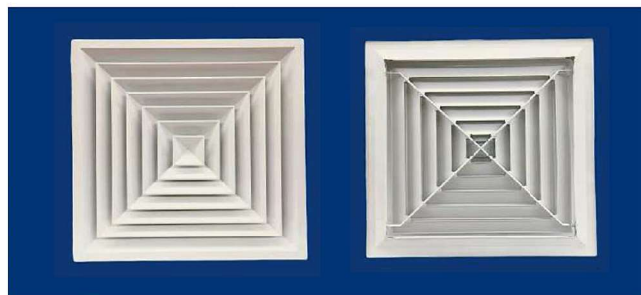

面部尺寸mm Face Size	A	595×595	525×525	450×450	375×375	300×300
喉部尺寸mm Neck Size	B	450×450	375×375	300×300	225×225	150×150
安装尺寸mm Installation Size	C	575×575	505×505	430×430	355×355	280×280

面部尺寸mm Face Size	A	600×600	525×525	450×450	375×375	300×300
喉部尺寸mm Neck Size	B	475×475	400×400	325×325	250×250	175×175
安装尺寸mm Installation Size	C	580×580	505×505	430×430	355×355	280×280

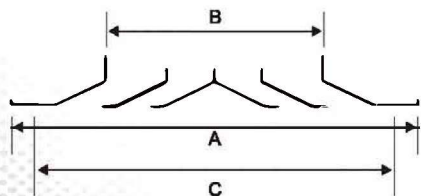

4 Way Square Air Diffuser

Specificity: Seamless for Punching Process

This kind of diffuser has a good function and good looking, for your choice. It has four types of air supply. Besides, it's easy to install and uninstall and it's mainly used for the central air-conditioning.


Material: Aluminium

Colour: RAL 9016 or others


4AD-B



面部尺寸mm Face Size	A	600×600	525×525	450×450	375×375	300×300
喉部尺寸mm Neck Size	B	440×440	365×365	290×290	215×215	140×140
安装尺寸mm Installation Size	C	570×570	495×495	420×420	345×345	270×270

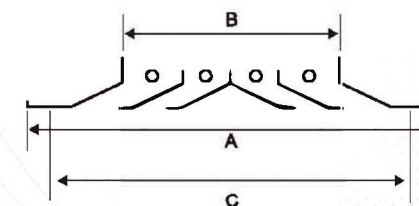

球型喷射口

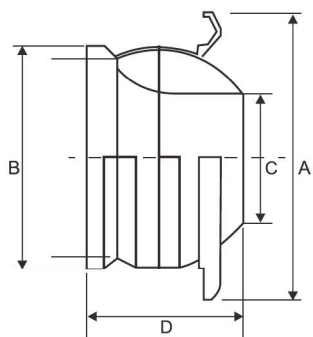

球型喷射口采用最佳的空气动力学喷射口结构设计，喷射口面可作30度转动，使它比其它送风口具有更长的射程和更高的风速。球型喷射口全部采用铝材冲压成型，它重量轻，外型优美、流畅。特别适合展览馆、音乐厅、大型购物中心等空间，高阔的高级场所。

Ball Jet Diffuser JDT

Ball jet diffuser is adopted the best aerodynamic design, the surface can be used as a 30 degree rotation. Compare the other outlet, this kind of outlet has a longer range and higher wind speed. The material is aluminum with light weight and good looking, smooth and is particularly suitable for the exhibition hall, concert hall, shopping center, etc.




规格Model	Φ100	Φ125	Φ150	Φ160	Φ200	Φ250	Φ315	Φ350	Φ400	Φ450	Φ500	Φ630
面部尺寸 mm Face Size A	Φ138	Φ172	Φ200	Φ210	Φ263	Φ310	Φ386	Φ433	Φ503	Φ525	Φ612	Φ705
喉部尺寸 mm Neck Size B	Φ97	Φ122	Φ148	Φ157	Φ198	Φ250	Φ313	Φ347	Φ396	Φ450	Φ498	Φ630
送风直径 mm Air Flow Diameter C	Φ44	Φ62	Φ74	Φ80	Φ105	Φ127	Φ165	Φ186	Φ212	Φ237	Φ258	Φ335
高度 mm Height D	85	95	105	122	135	180	233	235	270	310	305	375
安装尺寸 mm Installation Size	Φ120	Φ145	Φ170	Φ180	Φ220	Φ270	Φ335	Φ370	Φ420	Φ470	Φ520	Φ650

旋流风口

旋流风口广泛应用于高级场所及工业厂房内。旋流风口工作时将空气以螺旋状送出，保证高诱导率使温度迅速下降且噪声极小。旋流风口即可用于定风量也用于变风量的空调系统中。用于变风量的设备上时，风量允许在100%到25%之间变化。它可安装于天花板内或外，也可安装在敞开式的格栅式的顶棚内（最大厚度20mm），外型完全可以根据用户要求，以符合建筑物的特点。

Swirl Diffuser SWD


Swirl diffuser is mainly used in industrial plant. The swirl diffuser is working in low noise, the air will be spiral out to ensure the temperature dropped rapidly. The swirl diffuser also can be used in the system of variable air volume in between 25% to 100%. It can be installed on the ceiling (maximum thickness: 20mm). The out look can be designed according to the requirements from the customer.

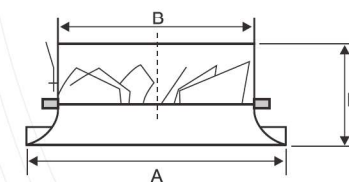

规格Model	Φ200	Φ250	Φ315	Φ400	Φ500	Φ630
面部尺寸 mm Face Size A	Φ320	Φ370	Φ470	Φ565	Φ660	Φ870
喉部尺寸 mm Neck Size B	Φ200	Φ250	Φ315	Φ400	Φ500	Φ630
高度 mm Height H	110	117	152	155	145	312
安装尺寸 mm Installation Size	Φ275	Φ330	Φ420	Φ520	Φ605	Φ820

可调球形出风口

可调球形出风口采用最佳的空气动力学喷嘴结构设计，喷嘴面可作30度转动，使它比其它送风口具有更长的射程和更高的风速。该风口全部采用铝材冲压成型。它重量轻、外型优美、流畅。特别适合展览馆、音乐厅、大型购物中心等空间，高阔的高级场所。

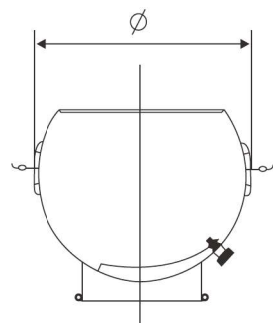

Ball Type Jet Diffuser JDTs

Ball type outlet is adopted the best aerodynamic design, the surface can be used as a 30 degree rotation. Compare the other outlet, this kind of outlet has a longer range and higher wind speed. The material is aluminum with light weight and good looking, smooth and is particularly suitable for the exhibition hall, concert hall, shopping center, etc.




规格Model	Φ146	Φ216	Φ280	Φ318	Φ366
安装尺寸 mm Installation Size	Φ120	Φ180	Φ250	Φ280	Φ330

座椅风口

特点：用于体育馆、电影院、会议室等公共场所的地板上或者座椅下送风。

Seat Diffuser FS

Seat diffuser is used in ground floor or under the seat to supply air the place which is in gymnasium, cinemas and other public meeting room.

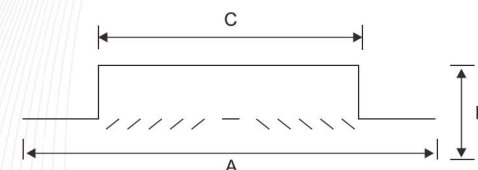

序号 No.	规格 Model	面部尺寸 Face Size A	喉部尺寸 Neck Size C	高度 Height H	安装尺寸 Installation Size
1	Φ120	Φ179	Φ118	108	Φ125

圆型散流器

圆型散流器采用铝板一次冲压成型。中间无接缝，风蕊组件可与外框分离，拆装方便。圆型散流器整体造型美观，重量轻，有良好的散流特性。广泛用于宾馆商场、大型写字楼等高档场所。

Round Air Diffuser


Round diffuser is made of aluminum, it's easy to install and uninstall. It's mainly used for hotels, shopping mall, office building etc.

RD-A




序号 No.	1	2	3	4	5	6	7	8	9	10	11	12
规格 Model	Φ220	Φ250	Φ300	Φ350	Φ380	Φ400	Φ450	Φ500	Φ530	Φ550	Φ600	Φ650
面部尺寸 mm A Face Size	Φ225	Φ248	Φ297	Φ346	Φ378	Φ395	Φ445	Φ497	Φ528	Φ547	Φ598	Φ653
喉部尺寸 mm B Neck Size	Φ96	Φ96	Φ147	Φ197	Φ227	Φ248	Φ295	Φ344	Φ375	Φ398	Φ447	Φ500
高度 mm C Height	60	58	58	58	58	58	58	58	63	54	58	62
安装尺寸 mm D Installation Size	Φ150	Φ200	Φ250	Φ300	Φ330	Φ350	Φ400	Φ450	Φ480	Φ500	Φ550	Φ600
Layer	2	2	3	3	4	4	5	5	6	6	7	7

RD-B

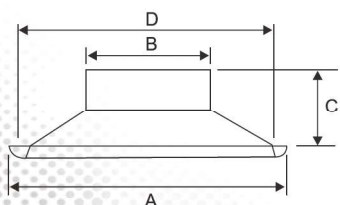

序号 No.	1	2	3	4	5
规格 Model	Φ150	Φ200	Φ250	Φ300	Φ350
面部尺寸 mm A Face Size	Φ252	Φ339	Φ394	Φ450	Φ495
喉部尺寸 mm B Neck Size	Φ140	Φ195	Φ245	Φ295	Φ345
安装尺寸 mm D Installation Size	Φ250	Φ300	Φ350	Φ400	Φ450
Layer	4	4	4	4	4

RD-C

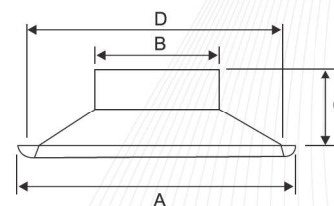

序号 No.	1	2	3	4	5	6
规格 Model	Φ150	Φ200	Φ250	Φ300	Φ350	Φ400
面部尺寸 mm A Face Size	Φ300	Φ400	Φ450	Φ500	Φ550	Φ600
喉部尺寸 mm B Neck Size	Φ145	Φ195	Φ245	Φ295	Φ345	Φ395
安装尺寸 mm D Installation Size	Φ250	Φ350	Φ400	Φ450	Φ500	Φ550
Layer	3	4	4	4	5	5

RD-D



序号 No.	1	2	3	4	5	6	7	8	9	10
规格 Model	Φ250	Φ300	Φ350	Φ400	Φ450	Φ500	Φ530	Φ550	Φ600	Φ650
面部尺寸 mm A Face Size	Φ248	Φ297	Φ346	Φ395	Φ445	Φ497	Φ528	Φ547	Φ598	Φ653
喉部尺寸 mm B Neck Size	Φ96	Φ147	Φ197	Φ248	Φ295	Φ344	Φ375	Φ398	Φ447	Φ500
高度 mm C Height	58	58	58	58	58	58	63	54	58	62
安装尺寸 mm D Installation Size	Φ200	Φ250	Φ300	Φ350	Φ400	Φ450	Φ480	Φ500	Φ550	Φ600
Layer	2	3	3	4	5	5	6	6	7	7

RD-E



规格Model	Φ150	Φ200	Φ250	Φ300	Φ350
面部尺寸 mm Face Size	Φ254	Φ304	Φ354	Φ404	Φ454
喉部尺寸 mm Neck Size	Φ144	Φ194	Φ244	Φ294	Φ344

RD-F




规格Model	Φ150	Φ200	Φ250	Φ300
面部尺寸 mm Face Size	Φ340	Φ430	Φ515	Φ610
喉部尺寸 mm Neck Size	Φ140	Φ195	Φ246	Φ293

高环形风口
Round Jet Air Diffuser RDT



为空调设备而设计的风口，一般适用于大型场所，如体育中心、机场、娱乐场所和工业区等。该产品送风距离远、噪声小等特点。主要用于高大空间侧送风系统，用户可根据不同需要选用不同规格以达到所需射程末端轴心速度和射流平均速度。

This diffuser is special design for the AC equipment, and it's mainly used for large buildings, such as sports centers, airports, entertainment facilities, industries zone etc. The diffuser is with low noise, you can adjust the speed of air supply by different requirements.

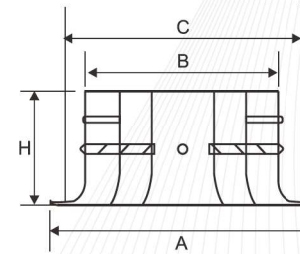

序号No.	1	2	3	4	5	6	7
规格Model	Φ150	Φ200	Φ250	Φ300	Φ350	Φ400	Φ450
面部尺寸 mm Face Size	Φ212	Φ260	Φ315	Φ370	Φ420	Φ473	Φ530
喉部尺寸 mm Neck Size	Φ143	Φ190	Φ242	Φ298	Φ338	Φ390	Φ444
高度 mm Height	95	115	135	160	200	215	236
安装尺寸 mm Installation Size	Φ170	Φ220	Φ270	Φ320	Φ370	Φ420	Φ470

环形风口 Round Jet Air Diffuser RDTs

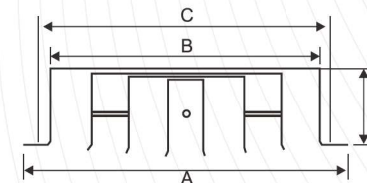

序号No.	1	2	3	4	5	6
规格Model	Φ150	Φ200	Φ250	Φ300	Φ350	Φ400
面部尺寸 mm Face Size	Φ198	Φ248	Φ310	Φ360	Φ410	Φ460
喉部尺寸 mm Neck Size	Φ147	Φ198	Φ240	Φ297	Φ349	Φ397
高度 mm Height	41	45	47	42	50	41
安装尺寸 mm Installation Size	Φ160	Φ210	Φ260	Φ310	Φ360	Φ410

圆盘铁风口 Disc Valve DSV

产品结构：外框为圆形，内芯为圆形扩散面。

产品特性：可调节内芯高低，调节气流的远近。气流分布均匀，外型美观，颈部直接与风管结合，也可直接与伸缩软管链接，适用于远距离、高风速，而接口处的三齿套筒设计，更具人性化，安装更为方便。




Item Structure: round frame and inner core is a round diffuser surface.

Item Characteristics: it can be adjusted to the inner core and air flow. The neck of diffuser directly connects the air ducts and can also directly connect the flexible ducts. It has the feature- long distance, high speed and easy installation,

序号 No.	1	2	3	4	5
规格 Model	Φ100	Φ125	Φ150	Φ160	Φ200
面部尺寸 mm A Face Size	Φ140	Φ165	Φ195	Φ230	Φ250
喉部尺寸 mm B Neck Size	Φ95	Φ123	Φ145	Φ155	Φ195
高度 mm H Height	48	50	55	55	52
安装尺寸 mm Installation Size	Φ110	Φ140	Φ160	Φ170	Φ210

圆盘铁风口 (出风)

Disc Valve DSV
(Supply Air)

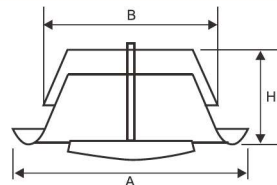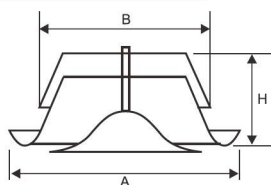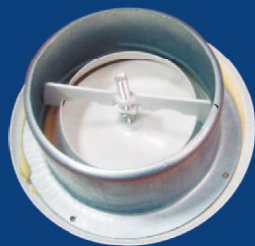

圆盘铁风口 (回风)

Disc Valve DSV
(Exhaust Air)



蛋格片 Egg Crate

蛋格片主要应用在中央空调用的铝合金蛋格风口，火车、地铁上的灯罩和冷气出风口，铝天花上用的蛋格灯罩和装饰用格栅。



Egg crate is mainly used in aluminum alloy egg crate grille which is in central air conditioning. It is often used for air vent on the train and metro, and used as aluminum ceiling with egg lamps and decorative grille.


Made of aluminium sheet

Thickness with painting: 0.38mm, 0.47mm

Grid distance: 12.7×12.7mm

Standard size: 1200×600mm, 1200×1200mm

Remark: other more size can be made as customers' request

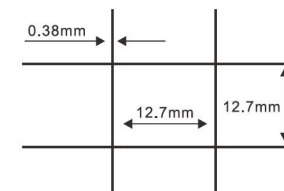


外气口 Round Exhaust Air Vent RLS

特点：该外气口适用于各种管道使用，具有防虫挡雨、美化环境的作用
适合范围：请安装在容易清理防虫网的地方。

This diffuser is suitable for using various of air ducts. And it can effect insects and rain and beautify the environment. Please install the place where it's easy to clean up the insect nets.

Material: SS201, SS304




序号 No.	1	2	3	4	5	6	7
规格 Model	Φ75	Φ100	Φ125	Φ150	Φ200	Φ250	Φ300
喉部尺寸 mm A Neck Size	Φ65	Φ93	Φ120	Φ145	Φ195	245	Φ295

人字闸 Opposed Blade Damper

人字闸是由多组对开对合的叶片来调节送风口风量，从而使送风口气流量恒定。常与散流器和单层、双层可调百叶等风口配套使用。人字闸由调节滑板同步调控闸叶开合角度，调节方便灵活。


Opposed blades damper is made of many pair of opening and closing blades to control air flow,so that there is constant air flow.It is often used on the square diffuser and adjustable single and double deflection grille.And this damper is controlled by adjustment slide plate synchronization opening and closing blade degree,so it's very convenient and flexible in use.



序号 No.	1	2	3	4	5	6
规格 Model	475x475	440x440	365x365	290x290	215x215	140x140

备注：可以做任何尺寸 Remark: Any sizes request

ABS 黑色风闸 ABS Round Damper

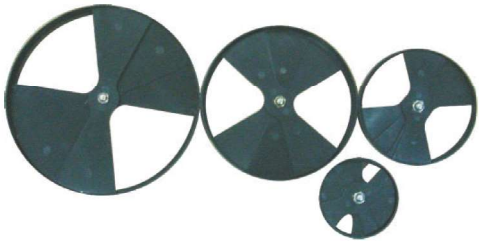

序号 No.	1	2	3	4	5	6	7	8	9
规格 Model	Φ100	Φ150	Φ204	Φ252	Φ303	Φ315	Φ354	Φ400	Φ456

扇形风闸 Round Opposed Blade Damper

风闸是为调节风口的散流气量而设计的一种可调节、对开对合式风量调节阀。经过人字闸的气流流量好恒定的速度是均匀的。转动调节按钮可使滑板同步地调节闸叶的开合角度，以达到风量调节的目的。其调节方便、稳定，闸叶在可调节内均能保持位置不变。该闸适用于安装多种风口的后面，达到调节气流大小的目的。根据不同需求，分为铁和塑料两种材质。

Air damper is adjustable and open and close dimidate air volume control damper which is designed to change the air diffuser flow.Then it can adjust the permanent speed evenly through air damper commanding air flow.So that it is easy to achieve air flow adjustment when moving the button and synchronously slide plate can change the opening and closing blade degree.Because of the convenient adjustment and stability,blade position keeps the same condition.And this damper is fit for installing the neckof air diffuser,so it's good for changing air flow.There are two types of air dampers,one is made of steel,the other one is made of PVC.



序号 No.	1	2	3	4	5	6	7
规格 Model	Φ145	Φ195	Φ245	Φ295	Φ345	Φ395	Φ445
高度 mm Height	10	12	12	12	12	12	12





序号 No.	1	2	3	4	5	6
规格 Model	Φ145	Φ195	Φ245	Φ295	Φ345	Φ395
高度 mm Height	58	80	80	58	67	56

检修门 Access Door


本产品主要由门框和门芯组成，通过0.6~0.8mm厚度的镀锌板冲压成型，不易生锈，结构坚固美观；检修门芯内装有22mm厚度的保温材料，门芯边夹有一条耐高温的密封橡胶条，达到密封盒恒温的作用。

This item is mainly consist of door frame and door core, stamping forming by thickness 0.6~0.8mm steel sheet. And there are some advantages-hardly rust, strong structure and good looking. Moreover there is thermal insulation material (thickness is 22mm) inside the access door core. In order to achieve the function of sealing and regular temperature, there is a high temperature sealing rubber strip in the door core edge clip.

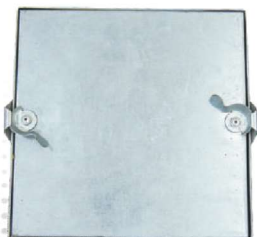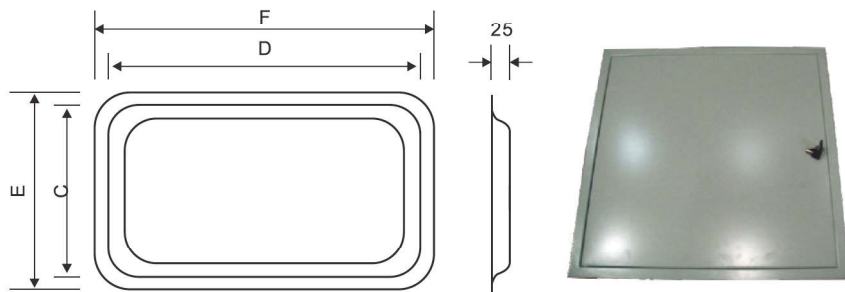

规格 Code Model	面部尺寸 mm Face Size ExF	喉部尺寸 mm Neck Size CxD	高度 mm Height
OAD1003	295×135mm	245×85mm	25mm
OAD1006	295×205mm	245×155mm	25mm
OAD1510	430×295mm	380×245mm	25mm
OAD2015	555×425mm	505×375mm	25mm
OAD2620	705×555mm	655×505mm	25mm

双层百叶风口 Double Deflection Air Grille

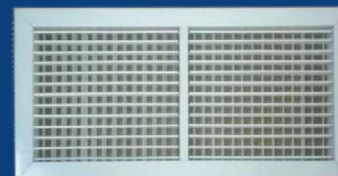

防水百叶风口 Weather Louver Air Grille



线槽风口 Linear Slot Diffuser



线型风口 Linear Diffuser





防水百叶风口
Weather Louver



ABS 塑钢圆形风口
ABS Rotatable Air Diffuser



线型风口
Linear Diffuser

圆形外框
Round Frame



面部尺寸 mm Face Size	Φ150	Φ170	Φ200	Φ250	Φ300	Φ350	Φ400	Φ450
喉部尺寸 mm Neck Size	Φ95	Φ115	Φ145	Φ195	Φ245	Φ295	Φ345	Φ395
安装尺寸 mm Installation Size	Φ105	Φ125	Φ155	Φ205	Φ255	Φ305	Φ355	Φ405



A款



ABS 可拆方形散流器
ABS Square Diffuser



B款



ABS 圆形风口
ABS Round Diffuser



可拆带网线槽风口 Removeable Linear Slot Diffuser



格仔线槽风口 Linear Slot Diffuser



导流风口 Plate Type Ceiling Diffuser




带框无边线条 Linear Grille



三面出风散流器
3 Way Square Diffuser




直角方散
Square Diffuser

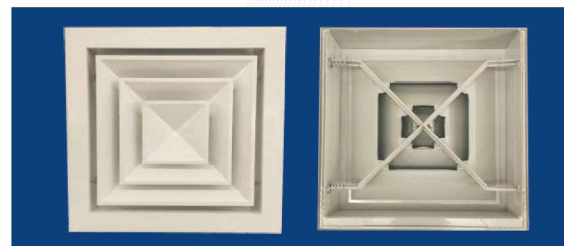

矩形风口
Rectangular Diffuser



双层百叶方散带方转圆 Double Deflection Diffuser with Adaptor

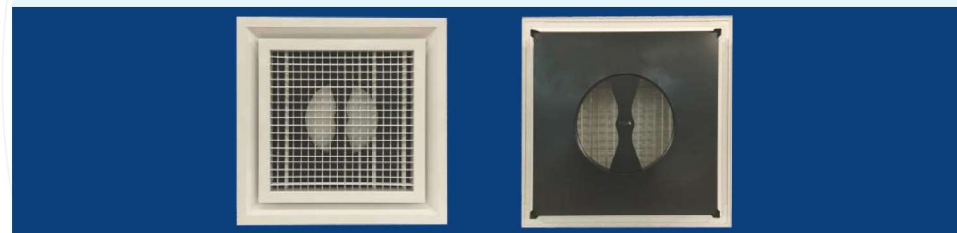



旋流板
Square Swirl Diffuser



圓形旋流板
Round Swirl Diffuser



扣板方圓散
Aluminum Circular Ceiling Diffuser



圓盤風口 Round Type Ceiling Diffuser



不銹鋼風口 Stainless Steel Air Grille



艺术风口 Decorative Air Grilles



HR-DAG001



HR-DAG002



HR-DAG003



HR-DAG004



HR-DAG005




HR-DAG006



艺术风口 Decorative Air Grilles



HR-DAG007

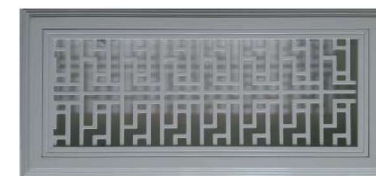


HR-DAG008




HR-DAG009



HR-DAG010

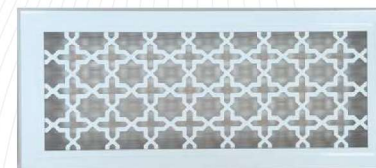

HR-DAG011

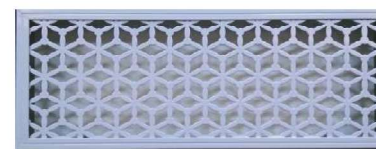


HR-DAG012



HR-DAG013



HR-DAG013A



法兰条	Flange Profile
规格 Specification:	20 30 40
材质 Material :	镀锌板 Galvanized iron
厚度 Thickness:	0.8-1.0mm



法兰夹	Flange Cleat
规格 Specification:	20mm 30mm
长度 Length:	100mm
材质 Material:	镀锌板 Galvanized iron
厚度 Thickness:	0.8-1.0mm



不锈钢	Stainless Steel
-----	-----------------



钩码	G-clamp A
钩码用于新型风管法兰之间的连接。 特点: 速度快、强度高 G-clamps are used for connecting air duct. Feature: high efficiency and high strength	
厚度 Thickness:	3.5mm
螺丝 Screw:	M8 × 25, M8 × 30



钩码	G-clamp B
钩码用于新型风管法兰之间的连接。 特点: 速度快、强度高 G-clamps are used for connecting air duct. Feature: high efficiency and high strength	
厚度 Thickness:	3.0mm
螺丝 Screw:	M8 × 25, M8 × 30



钩码	G-clamp C
钩码用于新型风管法兰之间的连接。 特点: 速度快、强度高 G-clamps are used for connecting air duct. Feature: high efficiency and high strength	
厚度 Thickness:	2.5mm
螺丝 Screw:	M8 × 16

TDC CORNER 法兰角码

型号Model	加工片厚Capacity (mm)	规格Size(mm)	实样Shape
J20-A	2.0 2.5 3.0	76 × 18	
J20-B	2.0 2.5 3.0	75 × 15	
J20-C	2.0 2.5 3.0	75 × 18	
J20-D	2.0 2.5 3.0	90 × 18	
J20-E	2.0 2.5 3.0	93 × 18	
J20-F	2.0 2.5 3.0	105 × 18	
J20-G	2.0 2.5 3.0	63 × 18	
J25-A	2.0 2.5 3.0	103 × 24	

TDC CORNER 法兰角码

型号Model	加工片厚Capacity (mm)	规格Size(mm)	实样Shape
J30-A	2.0 2.5 3.0	96 × 27	
J30-B	2.0 2.5 3.0	104 × 28	
J30-C	2.0 2.5 3.0	104 × 28	
J30-E	2.0 2.5 3.0	104 × 28	
J30-F	2.0 2.5 3.0	109 × 29	
J30-G	2.0 2.5 3.0	109 × 29	
J40-A	3.5-5.0	120 × 37	
J40-B	3.5-5.0	124 × 34	


TDF CORNER 共板角码

型号Model	加工片厚Capacity (mm)	规格Size(mm)	实样Shape
E20-A	1.2	80 × 22	
E20-B	1.5	77 × 19	
E20-C	1.2	79 × 20	
E20-D	2.0	109 × 23	
E30-A	1.5	107 × 30	
E30-B	1.2	109 × 30	
E30-C	1.2	108 × 32	
E30-D	0.8; 1.0	104 × 32	
E30-E	1.2; 1.5	109 × 30	
E30-F	1.2; 1.5	109 × 27	

TDF CORNER 共板角码

型号Model	加工片厚Capacity (mm)	规格Size(mm)	实样Shape
E30-G	1.5	110 × 30	
E30-H	1.2	111 × 33	
E30-J	1.5	103 × 31	
E30-K	1.2	106 × 33	
E30-L	1.0	100 × 31	
E30-M	1.5	105 × 29	
E30-P	1.5	123 × 28	
E30-Q	1.5	110 × 34	
E30-T	1.5	110 × 28	
E30-V	2.0	97 × 27	

配件 Hardware accessories



1001 方散铝杯



1002 风口角码




1003 风口弹簧



1004 拉钉



1005 铁心插销



1006 指甲销



1007 活动销



1008 角码插销



1009 包角插销



1010 弹簧座




1011 弹珠钩锁



1012 网钩




1013 检修口开关



1014 风闸开关



1015 安装锁



1016 安装弹簧



1017 拆胆铜头&铜套



1018 空调尼龙网



1019 检修口配件




1020 拉手碰珠


配件 Hardware accessories




1021 V型弹片



1022 不锈钢线槽夹




1023 加压送风口弹片




1024 风口弹片



1025 风口包角




1026 弹片



1027 弹片



1028 弹片




1029 弹片



1030 叶片卡簧



1031 软接




1032 软接钉



1033 风喉钉



1034 铁钉



1035 挂钩




1036 大小挂钩




1037 安装螺丝



1038 电机



1039 净化角码



1040 净化铝件

配件 Hardware accessories



1041 涡轮开关



1042 阀门电动链接



1043 阀门手柄



1044 余压阀杆



1045 圆筒月牙




1046 比型月牙



1047 手柄月牙



1048 大月牙



1049 铝阀黑底座+方轴圆轴



1050 调节铁夹



1051 阀门轴



1052 连杆



1053 易溶片



1054 密封胶条




1055 铝箔胶带



1056 吊码



1057 铝碟



1058 复合风管包角



1059 杂件



1060 螺丝

配件 Hardware accessories




2001



2002



2003



2004



2005




2006



2007



2008



2009




2010



2011



2012



2013 短连杆



2014 长连杆



2015



2016



2017



2018 连杆



2019



2020

配件 Hardware accessories



2021

2022

2023

2024




2025

2026

2027

2028

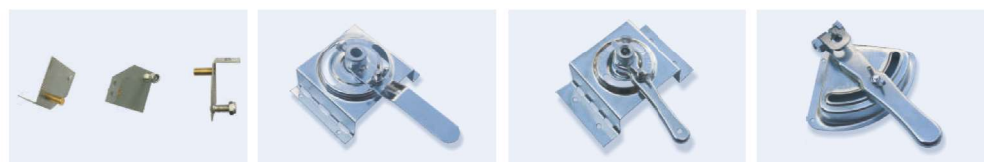

2029

2030

2031

2032



2033

2034

2035

2036




2037

2038

2039

2040

配件 Hardware accessories

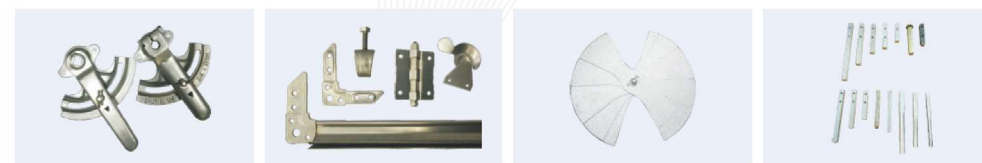

2041 SS304

2042 SS316

2043

2044



2045

2046

2047

2048



2049

2050

2051

2052




2053

2054

2055

2056

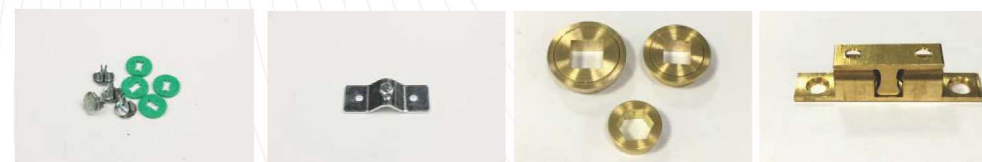

2057

2058

2059

2060

配件 Hardware accessories



2061



2062



2063



2064



2065



2066



2067



2068



2053 风口五金模具



2054 切通机



2055 攻牙机



2056 切角木方



2057 电动弧型机



2058 手动弧形机



2059 手推平台锯



2060 手摇平台锯



ABH-01 带钉胶轮



ABH-02 空心胶轮



ABH-03 厚胶轮



ABH-04 白胶轮

配件 Hardware accessories



ABH-05 铝阀胶轮



ABH-06 风机胶角



ABH-07



ABH-08 护角



ABH-09



ABH-10



ABH-11



ABH-12



ABH-13



ABH-14



ABH-15




ABH-16



ABH-17



ABH-18



ABH-19



ABH-20

内圆 Inside Dia	外圆 Outside Dia
Φ3.2	Φ4.8

Code	方孔 Square Hole	外圆 Outside Dia
A	12×12MM	Φ23.5
B	12×12MM	Φ23.5
C	12×12MM	Φ23.5
D	10×10MM	Φ20.5
E	10×10MM	Φ20.5

Code	内圆 Inside Dia	外圆 Outside Dia
A	Φ12.2	Φ16
B	Φ10.2	Φ13.2
C	Φ6.2	Φ10
D	Φ13.5	Φ16
E	Φ6.8	Φ12.5
F	Φ12.5	Φ27

Code	方孔 Square Hole	外圆 Outside Dia
A	8.2×8.2MM	Φ12.8
B	6.2×6.2MM	Φ9.8